




MECT
mechatronic thinking

AVAILABLE MODELS:

MPM P6

+39 011 966 46 16

sales@mect.it
srlmect@mect.it

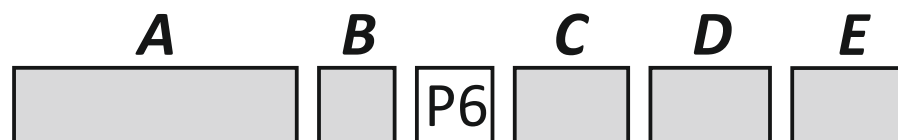

A - Model

MPM1522 = 0/4÷20mA inputs

MPM0502 = 0÷10V input

B - Serial outputs

Z = No serial outputs

2 = RS 422 bi-directional

3 = RS 485 bi-directional

4 = RS 232 bi-directional

C - Power supply

220 = 90÷260 Vac/Vdc

24 = 25 Vac

VCC = 12÷30 Vdc - 15÷30 Vdc (with **OAP**)

VPT = 12÷30 Vdc optoisolated

D - Alarms

Blank = No alarms

SR2 = 2 relay alarms

SR3* = 3 relay alarms

*SR3 only if the instrument is powered by a 220V

E - Analogue outputs

Blank = No analogue outputs

OAP = Analogue outputs

(0÷20mA, 4÷20mA, 0÷10V)