


MPCIB396 P6

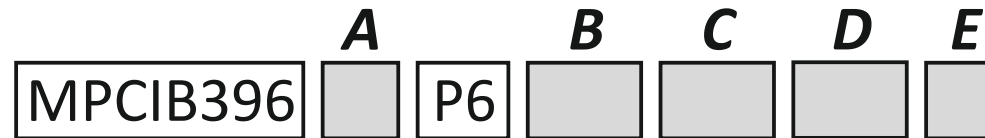

A - Serial outputs

- Z** = No serial outputs
- 12** = RS 422 optoisolated bi-directional
- 13** = RS 485 optoisolated bi-directional
- 14** = RS 232 optoisolated bi-directional

B - Power supply

- 220** = 90÷260 Vac/Vdc
- 24** = 20÷30 Vac/Vdc

C - Alarms

- Blank** = No alarms
- SR1** = 1 relay alarm
- SR2** = 2 relay alarms
- SR3** = 3 relay alarms

D - Analogue outputs

- Blank** = No analogue outputs
- OAP** = Analogue outputs (0÷20mA, 4÷20mA, 0÷10V)

E - Transducer power supply

- Blank** = Standard 16Vdc
- V5** = 5Vdc